

ARISTO-CRAFT CODE-A-MATIC CONTROL BOX

Aristo-Craft is proud to present this entirely new concept in a control box; a device that actually "thinks for you" AUTOMATICALLY! This perfect companion to the Aristo-Craft "Quad-Trol" selector escapement is self energized by a special auto wind mechanism, self neutralizing and will transmit your "selective" commands with precision. See Fig. 1.


The installation of the "code-A-Matic" control box is simple requiring but 2 steps for attaching to your transmitter:

- 1: Disconnect the wires from your transmitter "Keying or Transmitting" switch.
- 2: Connect - the two wires from the "Code-A-Matic" control box to the two wires you have disconnected from the "Keying or Transmitting" switch of your transmitter.



The installation is now completed; if you wish to mount your "Code-A-Matic" on your transmitter, drill a hole in your transmitter case to accept the hollow stud of your control box. See Fig. 2.

Operating Instructions:

- 1: Except when sending a signal, DO NOT touch control stick. This is only a precaution, you may send an unintentional signal by a careless movement of control stick.
- 2: Push control stick to it's complete travel in the selected control direction.
- 3: Allow control stick to Neutralize BEFORE sending your next command.
- 4: Be careful in using your "Code-A-Matic" when your model is coming TOWARDS you; always control your model as if you were actually sitting in the pilot's seat,

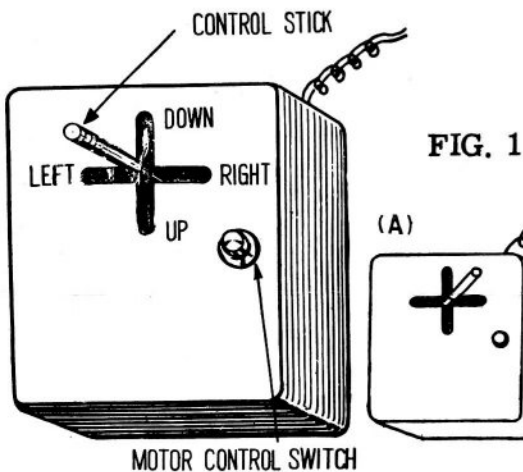

- (A) Control Stick To Right ; Right Rudder
- (B) Control Stick To Left ; Left Rudder
- (C) Control Stick Toward you; Elevator Up
- (D) Control Stick Away From You; Elevator Down
- (E) Push Button ; Motor Control

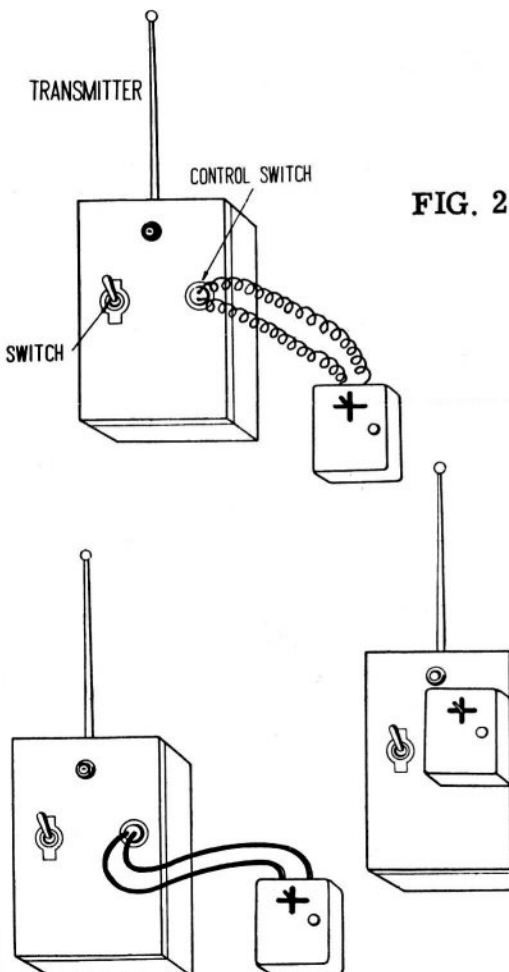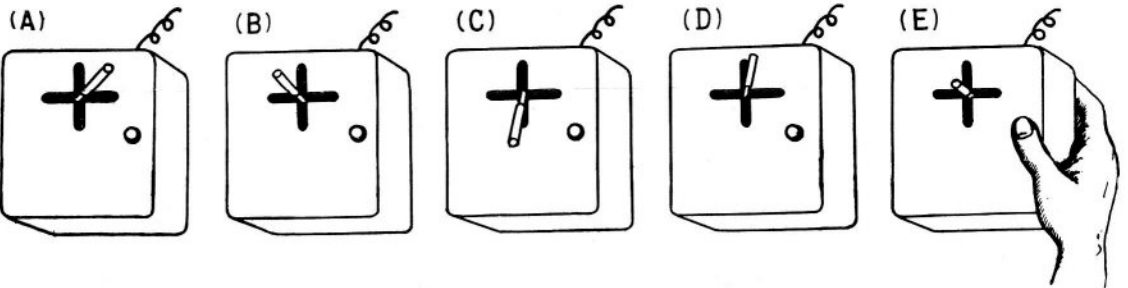

WARRANTY AND GUARANTEE

Factory assembled and tested Aristo-Craft Radio Control Equipment is warranted for a period of thirty days from the date of purchase. Any factory assembled and tested unit that fails to operate within this period will be repaired or replaced FREE OF CHARGE upon return DIRECTLY TO THE FACTORY. This warranty is void if the equipment has been tampered with, excessive voltage used, modified, used with acid core solder, or otherwise abused beyond that encountered in normal use.

(A) Send your equipment direct to ARISTO-CRAFT DISTINCTIVE MINIATURES, Radio Control Dept., 184 Pennsylvania Ave., Newark 2, N.J. Do not return your equipment to your hobby dealer; he is not authorized to make repairs, adjustments, or exchanges. Any commitment your dealer may make is his own responsibility and does not bind Aristo-Craft to said commitment unless written authorization is given by Aristo-Craft.

(B) Pack in a rugged container, wrap your package carefully, AND CLEARLY PRINT your RETURN name and address in the upper left-hand corner. DO NOT ship in the original packaging as it is not considered adequate for safe shipment. We cannot be held liable for damage due to poor or insufficient packaging.

(C) DO NOT SEND BATTERIES OR BATTERY BOXES.

(D) Send package by INSURED MAIL.

We will make every effort to return your fully repaired unit in ten days or less.